

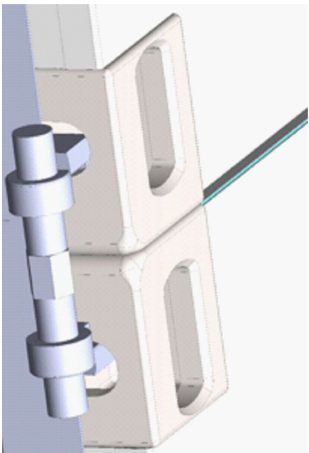
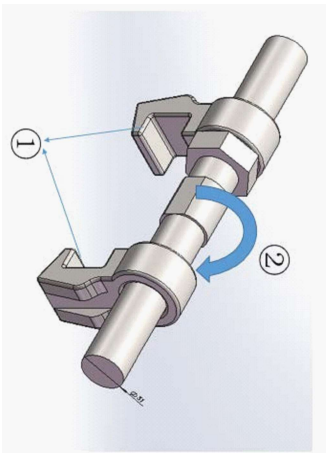


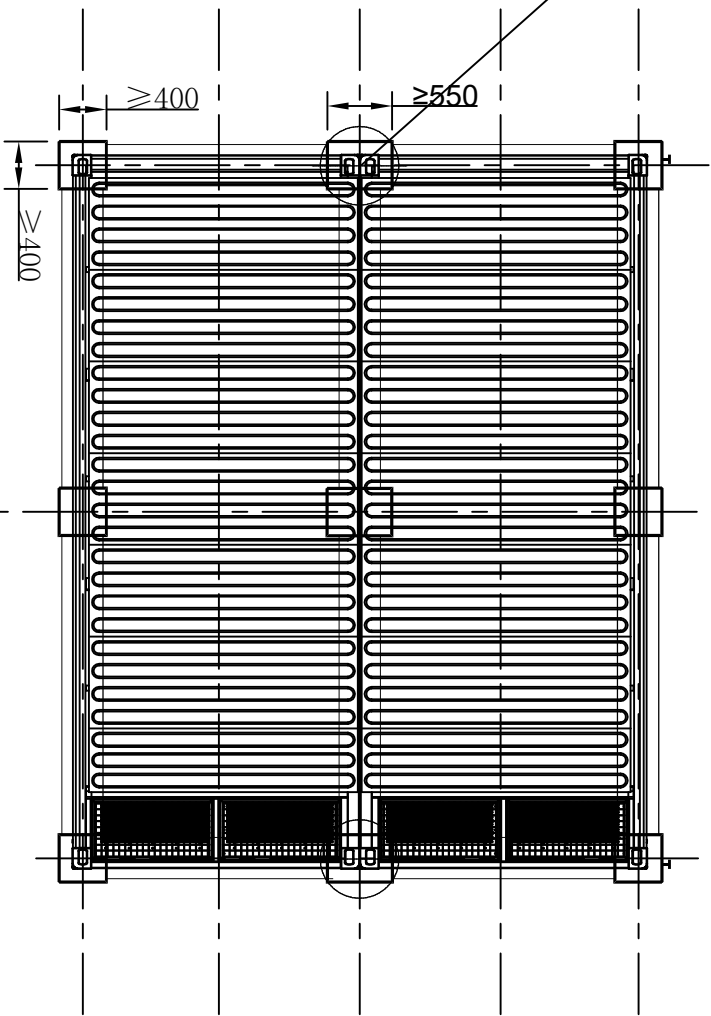

- General notes.
1. Container back to back fixed, two adjacent containers can be fixed with bridge locks, bridge lock fixed point for B1/B3 position of the top, the schematic diagram for the installation principle, each group of back to back need to install 2 bridge locks, subject to the actual size of the accessories.
 2. The bottom of the container fixed program reference Figure M150.
 3. When the bridge lock is used for installation, the recommended space between two back-to-back contains is 20mm-150mm, containers should not add force to each other.

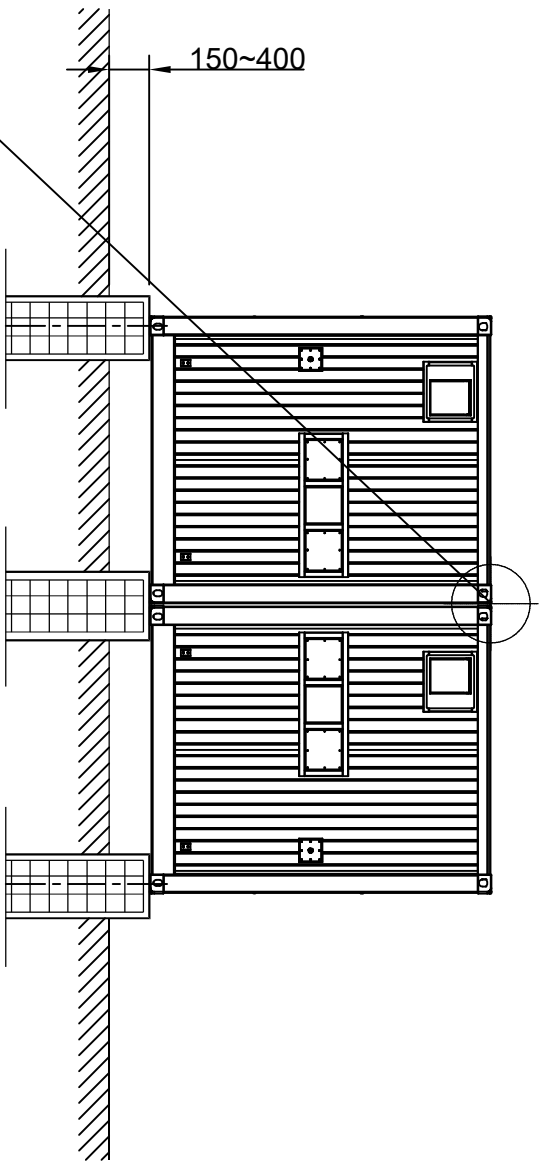

 CanadianSolar					DRAWING NAME: Solbank back-to-back installation diagram	
All rights reserved. No part of this document may be reproduced or transmitted in any form without the written permission of CSI.					DRAWING NO.:	
					M160	
DESIGNED BY		DATE	Standardizing	DATE	PROJECT: SolBank3.0 0.25P-US-LH	
CHECKED BY		DATE	APPROVED BY	DATE		
					PART NO.:	
REV.		PROJECTION	UNIT	SCALE		
A1			mm	1:1		