


产品特点 Product Features

- 电池内部无游离酸, 气体复合效率高, 使用安全性高。
- 特殊板栅合金, 合适的电解液比重, 充分保证寿命。
- 极板采用双面涂膏技术, 确保电池性能一致优越。
- 汤浅经典设计, 使用广泛, 用户认可度极高。
- No free acid inside battery, high efficient gas recombination, high operation safety.
- Special alloy of grid, adequate specific gravity of electrolyte secures the battery life.
- Two-sided plating technology, more advantage battery function.
- Classic design, extensive application, high recognition of users.



外形尺寸 (mm) Dimension

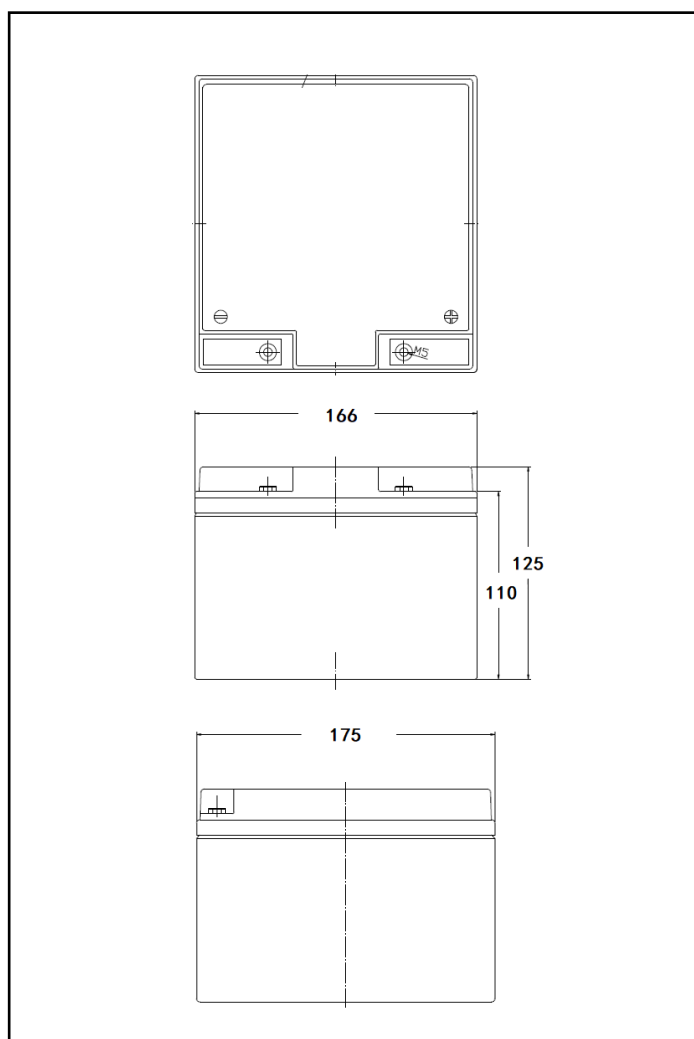


电池特征 Battery Characteristics

标称电压 (V) Nominal Voltage	12	
容量 Capacity (25℃)	20 小时率	25Ah
	10 小时率	24Ah
	5 小时率	22Ah
	1 小时率	15.5Ah
外观尺寸 Dimension	长 L (mm)	175
	宽 W (mm)	166
	高 H (mm)	125
	总高 OH (mm)	125
不同环境温度下的放置期限 Storage period at various temperature	25℃以下	6 个月
	30℃以下	4 个月
	35℃以下	3 个月
	40℃以下	2 个月
运行温度 Operating Temp Range	放电 Discharge	-15℃~50℃
	※ 充电 Charge	-15℃~40℃
	存储 Storage	-15℃~40℃
推荐温度 Nominal Operating Temp Range		25℃
※ 当温度偏离 25℃时, 要用温度补偿后的电压充电 If the temperature varies from 25℃, Charge with voltage after temperature compensation		
重量 Weight		约 8.0 kg
端子 Terminal		铜芯(M5)
池壳材料 Container material		ABS
内阻 (完全充电) IR, fully charged (25℃)		约 8~12 mΩ
浮充使用期充电方法 Charging method for floating use (25℃)		定电压 13.65V 限流 2.4~6A
设计浮充寿命 Designed float life		6 年(25℃)

电池限流恒压充电特性

Charge Characteristics Constant Voltage with Current Limit

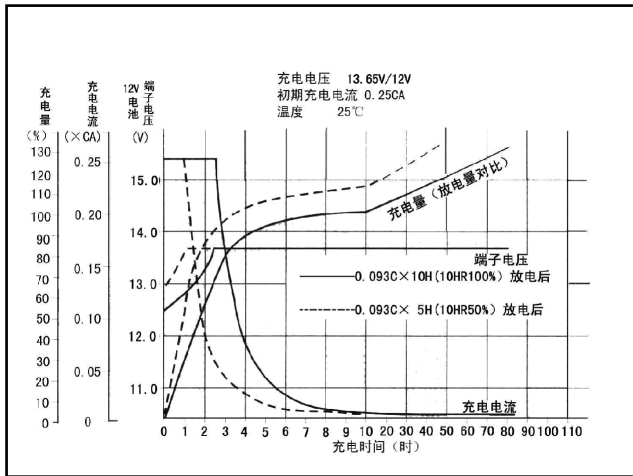

放电电流和终止电压的关系

Relationship of Discharge Current to Final Discharge Voltage Allowed

放 电 电 流 Discharge current	放电允许最低终止电压 Lowest Discharge Final Voltage Allowed
0.2CA 未 满	1.75V/单格
0.2CA 以上 0.5CA 未 满	1.70V/单格
0.5CA 以上 1.0CA 未 满	1.55V/单格
1.0CA 以上	1.30V/单格

定功率放电表 Constant Wattage Discharge Characteristics

(25°C 瓦特/单格 watts/Cell)

终止电压	10min	15min	20min	30min	40min	45min	60min	1.5h	2h	3h	4h	5h	10h
1.65V	96.8	77.0	63.6	48.4	39.3	35.0	29.3	21.8	18.2	13.3	10.5	8.3	4.6
1.67V	95.3	75.9	62.7	47.9	38.8	34.6	28.8	21.5	18.0	13.2	10.4	8.2	4.6
1.70V	93.2	74.1	61.4	47.2	38.1	34.0	28.2	21.1	17.6	12.9	10.2	8.0	4.5
1.75V	88.4	70.3	58.3	44.9	36.4	32.6	27.2	20.4	17.0	12.5	9.8	7.7	4.3
1.80V	83.3	66.1	55.1	42.4	34.5	31.0	26.0	19.4	16.2	11.9	9.4	7.4	4.2

充电注意:

当温度偏离 25°C 时,请按每变化 1°C,浮充使用按-3mV/单格进行修正,均充按-4mV/单格进行修正。

Charging Recommendations

If the operating temperature varies significantly from the center value (25°C), temperature compensation for the charging voltage is recommended. The recommendation is -3mV/°C/cell for float use, and -4mV/°C/cell for cyclic use.



杰士汤浅株式会社 GS YUASA CORPORATION
广东汤浅蓄电池有限公司
地址: 广东省佛山市顺德区大良
热线电话: 400-930-0628
电话: 0757-22620901 传真: 0757-22635775
<http://www.gdyuasa.com>

认证标识: Approval indication

